
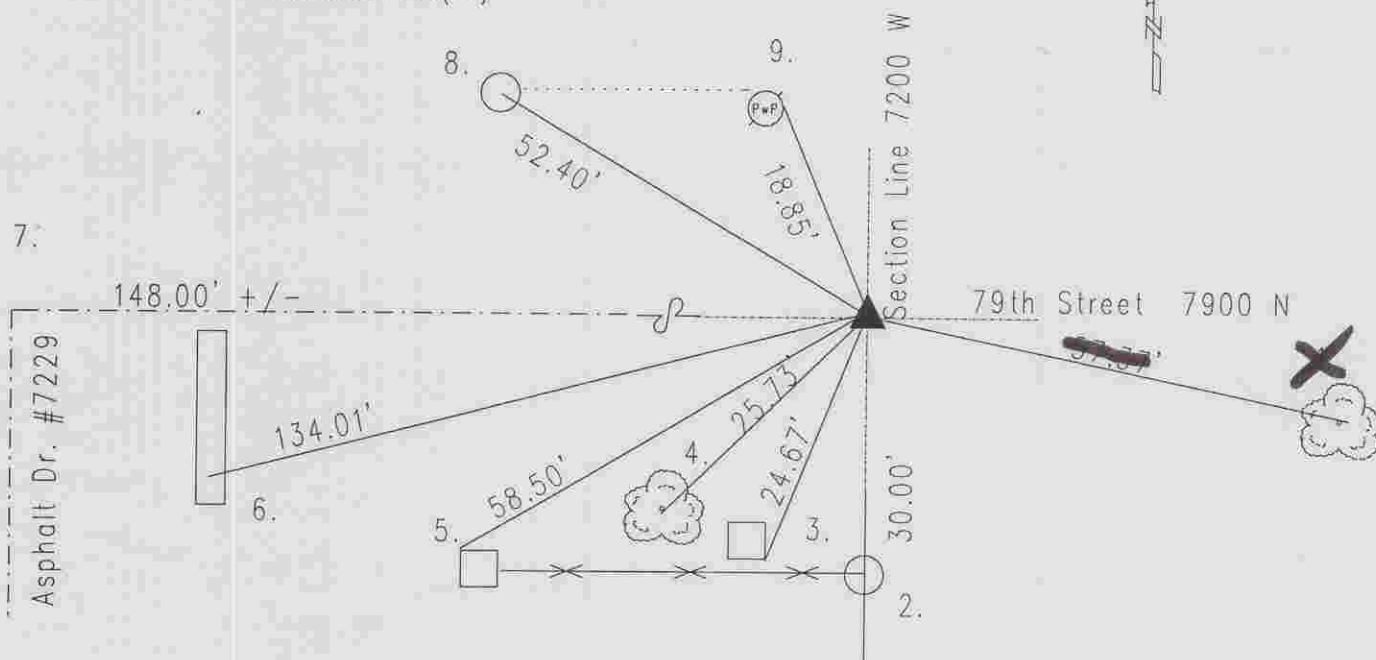


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 27 TOWNSHIP 17 RANGE 2
DATE: 9-20-01 3-3-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County
Am.Con: 5-21-75

IN. S.P.C. E ZONE, NAD 83
NAME: 17022702
N: 516119.4300(m)
E: 46835.4780(m)

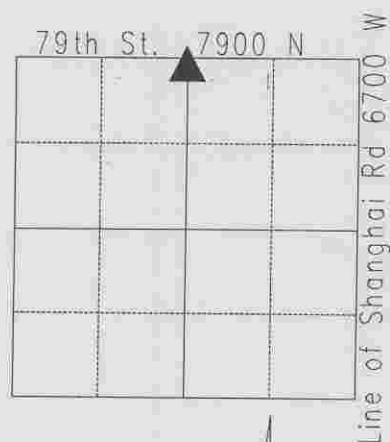

Original post set 1821 by Wm. B. Laughlin with witnesses: 10" buckeye N 39 E 15 links, and 4" hickory S 22 links per Marion County Atlas pg. 4. Survey by Percy Hosbrook 11-8-1850 indicates no stone or witness per Pike Township Legal Survey Book pg. 41. Reference by Schmidt 8-31-61 called a pipe. Miller 5-21-75 called a 3/4" rebar. Kiste 10-5-94 called the same. Wilcoxon 4-23-00 called 3/4" rebar. Excavated 9-20-01 by Wilcoxon, and 3/4" rebar 24" long found 4" down. Harrison set. No other points were found.

SC 722702

REF.	DISTANCE	DESCRIPTION
1.		Mag nail w/brass washer N 30" cypress 24" up
2.	30.00'	Due S to N-face of round steel fence post
3.	24.67'	SE corner of bell box #723
4.	25.73'	Mag nail w/brass washer NW 18" ash 8" up
5.	58.50'	NW corner of square fence post for chain link fence
6.	134.01'	Cut 'x' S-end of E concrete headwall
7.	148'+/-	Due W to C/L of asphalt drive for ADDRESS 7229
8.	52.40'	Rebar S-guy anchor
9.	18.85'	PK nail E PwP#22-222 12" up